


Size, Weight and Recommended Flow Rate


Nominal Diameter	(mm)	50	80	50	65	80	100	125	150	200	250	300
	(inch)	2"	3"	2"	2½"	3"	4"	5"	6"	8"	10"	12"
Dimensions	D (mm)	50	80	50	65	80	100	125	150	200	250	300
	L (mm)	200	225	200	200	225	250	250	300	Röhre Moos AG		
	B (mm)	130	130	165	185	200	220	250	285	Artikelnr.:		
	H (mm)	215	230	250	265	280	290	305	340	BEWU80T -und BEWU80TM89		
Weights	(kg)	4.5	7.5		10.0		10.0	17.5				
	(kg)	-	-	2.5	-	3.0	3.5	-	5.5	-	-	-
Connections	Threaded	BSP NPT				Flanged ISO PN16/10 ANSI 150						
	Nominal Flow Rate	Q₃ (m³/h)	25	63	25	40	63	100	160	250	400	630
Minimum Flow Rate	Q₁ (m³/h)	1.0	2.5	1.0	1.6	2.5	4.0	6.4	10.0	16.0	25.2	40.0
Transitional Flow Rate	Q₂ (m³/h)	1.6	4.0	1.6	2.5	4.0	6.4	10.2	16.0	25.6	40.3	64.0
Overload Flow Rate	Q₄ (m³/h)	31	80	31	50	80	125	200	312	500	788	1250

NOTE: Flow suitable to directive ISO 16399

Dimensions

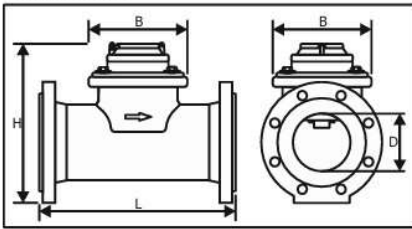

Typical Accuracy Curve

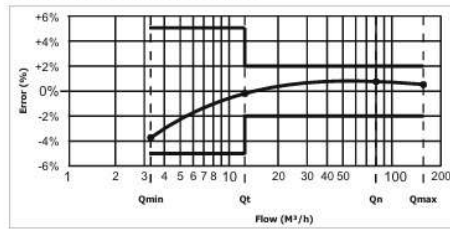

Head Loss diagram

