




FLANGED SOFT SEALING GATE VALVE S15 3000 DN 40 - 300 PN25

Röhre Moos
www.roehremoos.ch

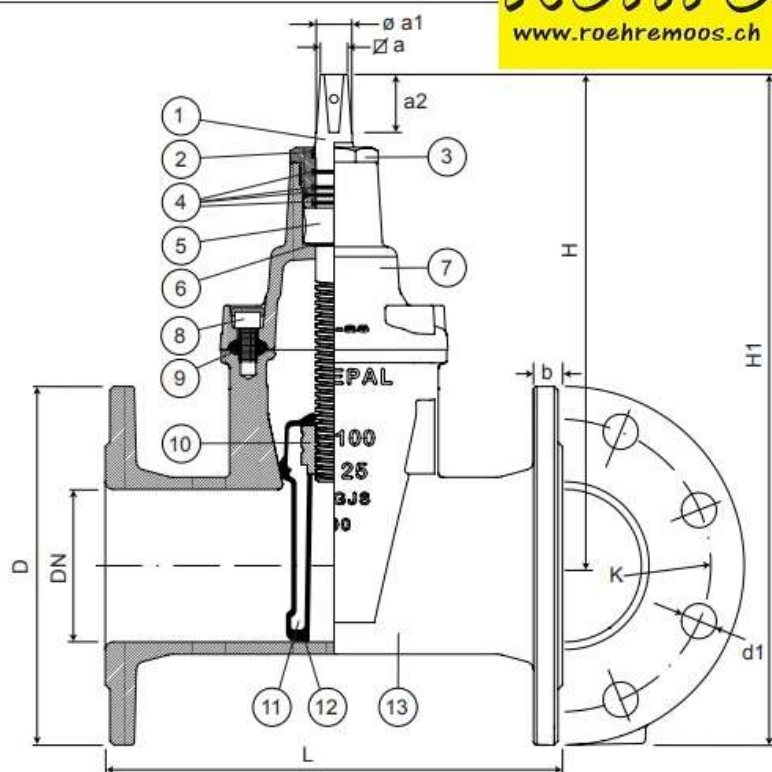

DN 40 up to DN 200



DN 250 up to DN 300

Component list

pos	components	material	standard
1	Stem	Stainless steel AISI 420	EN 10088-1
2	Clearing joint	Elastomer	-
3	Gland	Brass DZR CW602N	EN 12164
4	O-rings	Elastomer EPDM	EN 681-1
5	Stem washer	Brass DZR CW602N	EN 12164
6	O-ring	Elastomer EPDM	EN 681-1
7	Bonnet	Ductile iron EN-GJS-500-7	EN 1563

pos	components	material	standard
8	Bolts	Stainless steel A2	EN 10088-1
9	Bonnet gasket	Elastomer EPDM	EN 681-1
10	Wedge nut	Brass DZR CW626N	EN 12164
11	Wedge	Ductile iron EN-GJS-500-7	EN 1563
12	Wedge covering	Elastomer EPDM	EN 681-1
13	Body	Ductile iron EN-GJS-500-7	EN 1563
14	Bearing	Steel	ISO 20516

Reference and dimensions

 Lochbild gebohrt so das Flansch NW100 PN16 und PN25 montiert werden kann!

Röhre Moos
www.roehremoos.ch

DN	PN	code	D	L	H	H1	K	n° x d1	b	Ø a	Ø a1	a2	turns to open	Kg approx.
mm			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
40	25	10726014	150	240	203	278	110	4 x 19	19	14.1	20	29	10	9
50	25	10726024	165	250	235	318	125	4 x 19	19	14.1	20	29	13	11
60	25	10726034	175	270	250	338	135	8 x 19	19	17.1	22	34	13	13
65	25	10726044	185	270	250	343	145	8 x 19	19	17.1	22	34	13	14
80	25	10726054	200	280	290	390	160	8 x 19	19	17.1	22	34	16	19
100	25	10726064	235	300	325	443	180/190	8 x 23	19	19.1	24	38	20	25
125	25	10726074	270	325	362	497	220	8 x 28	19	19.1	26	38	25	31
150	25	10726084	300	350	425	575	250	8 x 28	20	19.1	28	38	30	45
200	25	10726094	360	400	505	685	310	12 x 28	22	24.1	32	42	34	65
250	25	10726104	425	450	595	808	370	12 x 31	24.5	27.1	36	47	42	97
300	25	10726114	485	500	670	913	430	16 x 31	27.5	27.1	36	47	50	136